

YOUR DETAILS

Name: _____ Company Name: _____
 Address: _____
 Tel: _____ Fax: _____
 E-mail: _____ Your Reference: _____



SALES OFFICE : 170 Lodge Lane, Hyde, Cheshire SK14 4LB
 TEL : 0161 612 6893 FAX : 0161 285 1503
 WEB : www.glassblocks.co.uk
 E-MAIL : info@glassblocks.co.uk

GENERAL NOTES : Rods & Mortar can be used internally and externally for straight and curved glass block walls. For 60/15 or 120/30 fire rated walls please contact Glass Block Technology on the number above.

GLASS BLOCK STYLE

PANEL DIMENSIONS

NOTE : IF A SINGLE DIMENSION EXCEEDS 6m, AN INTERMEDIATE SUPPORT OR SLIP EXPANSION JOINT SHOULD BE INCORPORATED.

	NAME/TYPE <small>ie FLEMISH</small>	SIZE <small>ie 190X190X80mm</small>	CLEAR/COLOURED <small>ie COBALT BLUE</small>	Nº. BLOCKS HIGH	X	Nº. BLOCKS WIDE	Nº. OF PANELS	ALTERNATIVELY GIVE FULL PANEL DIMENSIONS	
1	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	X	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
2	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	X	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
3	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	X	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
4	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	X	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
5	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	X	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

SAFEWALL (COMPLETE AS REQ'D)

NOTE : FOR BEST INTEGRAL STRENGTH, GLASS BLOCK PANELS SHOULD BE INSTALLED INTO A FOUR-SIDED OPENING.

END POSTS

NO. OF POSTS REQ'D : FINISH : WHITE SILVER GREY END BOSS : POLISHED BRUSHED SATIN

CORNER POSTS

A PAIR OF BOSS SECTIONS IS REQUIRED PER POST USED

NO. OF POSTS REQ'D : FINISH : WHITE SILVER GREY CORNER BOSS : POLISHED BRUSHED SATIN

CURVED PANELS

IF CONSTRUCTING CURVED WALL, PLEASE GIVE INTERNAL RADIUS DIMENSION :

FIRE RATING

ARE ANY OF THE PANELS FIRE RATED?

LINE 1 2 3 4 5

G60/F15 G120/F30

SPECIALIST GLASS BLOCKS (PLEASE SUPPLY SKETCH)

INDICATE STYLE AND NO. OF BLOCKS REQUIRED :

END DOUBLE END

CORNER RADIUS

NOTE : GLASS BLOCK TECHNOLOGY RODS & MORTAR QUOTATIONS ARE BASED ON USING 10mm JOINTS.

SPECIAL CIRCUMSTANCES/COMMENTS


DESPATCH DETAILS PLEASE STATE DELIVERY ADDRESS IF DIFFERENT FROM ABOVE:

SPECIFY DELIVERY SERVICE (TICK AS REQUIRED) : 3 TO 5 DAY ECONOMY OVERNIGHT

OVERNIGHT CARRIAGE IS SUBJECT TO A SURCHARGE.

DRAWINGS

Sketch layout as required :

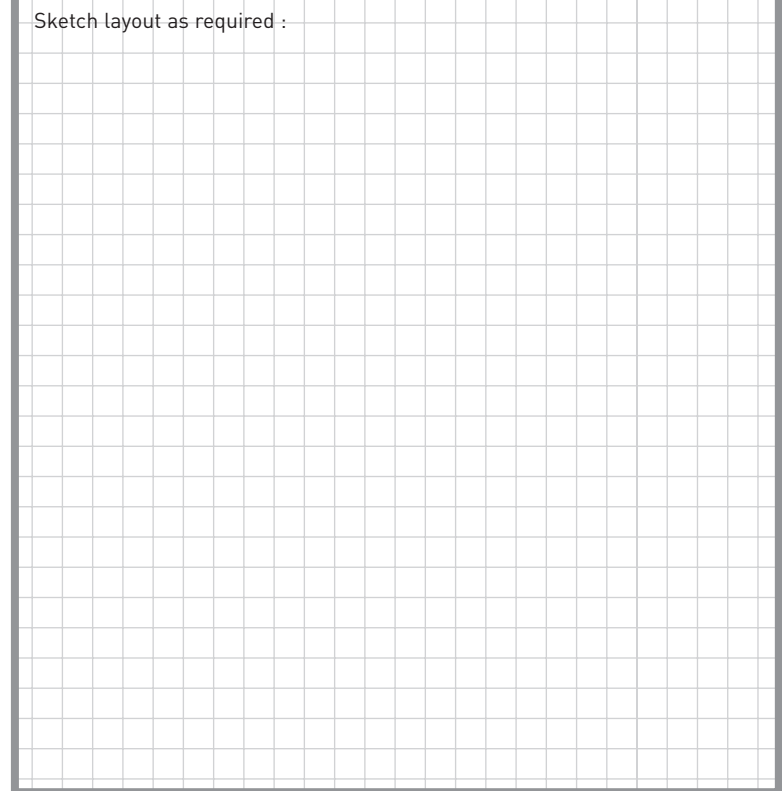

YOUR DETAILS

Name: _____ Company Name: _____
 Address: _____
 Tel: _____ Fax: _____
 E-mail: _____ Your Reference: _____



SALES OFFICE : 170 Lodge Lane, Hyde, Cheshire SK14 4LB
 TEL : 0161 612 6893 FAX : 0161 285 1503
 WEB : www.glassblocks.co.uk
 E-MAIL : info@glassblocks.co.uk

GENERAL NOTES : Easifix is recommended for internal use only • Maximum panel size 9m² • Easifix can only be used for constructing straight glass block walls • Easifix installation method carries no fire rating.

GLASS BLOCK STYLE

PANEL DIMENSIONS

NOTE : ONLY 80mm WIDE GLASS BLOCKS CAN BE USED IN CONJUNCTION WITH EASIFIX

NAME/TYPE <small>ie FLEMISH</small>	SIZE <small>ie 190X190X80mm</small>	CLEAR/COLOURED <small>ie COBALT BLUE</small>	N°. BLOCKS HIGH	X	N°. BLOCKS WIDE	N°. OF PANELS	ALTERNATIVELY GIVE FULL PANEL DIMENSIONS
1	<input type="text"/>	<input type="text"/>	<input type="text"/>	X	<input type="text"/>	<input type="text"/>	<input type="text"/> mm HIGH X <input type="text"/> mm WIDE
2	<input type="text"/>	<input type="text"/>	<input type="text"/>	X	<input type="text"/>	<input type="text"/>	<input type="text"/> mm HIGH X <input type="text"/> mm WIDE
3	<input type="text"/>	<input type="text"/>	<input type="text"/>	X	<input type="text"/>	<input type="text"/>	<input type="text"/> mm HIGH X <input type="text"/> mm WIDE
4	<input type="text"/>	<input type="text"/>	<input type="text"/>	X	<input type="text"/>	<input type="text"/>	<input type="text"/> mm HIGH X <input type="text"/> mm WIDE
5	<input type="text"/>	<input type="text"/>	<input type="text"/>	X	<input type="text"/>	<input type="text"/>	<input type="text"/> mm HIGH X <input type="text"/> mm WIDE

EASIFIX SLEEVE

DO YOU REQUIRE EASIFIX SLEEVE? YES NO

PRECAST EASIFIX

TICK IF YOU REQUIRE ALTERNATIVE QUOTATION FOR PRECAST EASIFIX

JOINT FINISH (TICK THE OPTION YOUR CLIENT REQUIRES AS A JOINT FINISH)

WHITE GROUT CLEAR SILICON WHITE SILICON NOTE : PRECAST EASIFIX PANELS ARE ONLY FINISHED IN WHITE GROUT.

SAFEWALL (COMPLETE AS REQ'D)

NOTE : FOR BEST INTEGRAL STRENGTH, GLASS BLOCK PANELS SHOULD BE INSTALLED INTO A FOUR-SIDED OPENING.

END POSTS

NO. OF POSTS REQ'D : FINISH : WHITE SILVER GREY END BOSS : POLISHED BRUSHED SATIN

CORNER POSTS

A PAIR OF BOSS SECTIONS IS REQUIRED PER POST USED

NO. OF POSTS REQ'D : FINISH : WHITE SILVER GREY CORNER BOSS : POLISHED BRUSHED SATIN

SPECIAL CIRCUMSTANCES/COMMENTS

DESPATCH DETAILS PLEASE STATE DELIVERY ADDRESS IF DIFFERENT FROM ABOVE:

SPECIFY DELIVERY SERVICE (TICK AS REQUIRED) : 3 TO 5 DAY ECONOMY OVERNIGHT

OVERNIGHT CARRIAGE IS SUBJECT TO A SURCHARGE.

DRAWINGS

Sketch layout as required :